



TEST REPORT

According to ANSI/IES LM-80-15
For

Hongli Zhihui Group Co.,Ltd. Guangzhou Branch

Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China

Model: HL-AS-2835HW-3C-S1-08L-PCT-HR5

Report Type: 6000 Hours Test Report		Product Type: LED Package	
Test Engineer:	Pote Wang	<i>Pote Wang</i>	
Report Number:	RSZ181103501-10		
Test Date:	2018-11-05 to 2019-07-15		
Report Date:	2019-07-23		
Reviewed By:	Bill Xiong / EE Engineer	<i>Bill Xiong</i>	
Test Facility:	Test facility was located at No.69,Pulongcun ,Puxinhu Industrial Area, Tangxia , Dongguan, Guangdong, China.		
Prepared By:	Bay Area Compliance Laboratories Corp. (Dongguan). No.69,Pulongcun ,Puxinhu Industrial Area, Tangxia , Dongguan, Guangdong, China. Tel: +86-0769-86858888 Fax:+86-0769-86858588		
Accreditation:	The IAS Accreditation Number TL-460.		

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

1 - General Information	3
1.1 Description of LED Light Sources	3
1.2 Standards and Reference Documentations	5
1.3 Testing Equipment	6
1.4 Drive Level	6
1.5 Ambient Conditions for Maintenance Test	6
1.6 Photometric Measurement Method and Uncertainty.....	6
1.7 Statement of Traceability	6
1.8 Sample Set.....	7
2 - Summary of Test Result	8
3 - Test Data	9
3.1 Data Set 1, 85°C, 100mA (Lumen Maintenance)	9
3.2 Data Set 1, 85°C, 100mA (Forward Voltage).....	10
3.3 Data Set 1, 85°C, 100mA (Chromaticity Shift).....	11
3.4 Data Set 2, 105°C, 100mA (Lumen Maintenance)	12
3.5 Data Set 2, 105°C, 100mA (Forward Voltage).....	13
3.6 Data Set 2, 105°C, 100mA (Chromaticity Shift).....	14
4 - DUT Photo	15
4.1 Mechanical Dimensions	15
4.2 DUT Photo.....	15

1 - General Information

1.1 Description of LED Light Sources

Sample Size:

50 PCS samples were received on 2018-11-03. The samples were numbered from 1 to 25 and 26 to 50.

Manufacturer:	Hongli Zhihui Group Co.,Ltd. Guangzhou Branch
Part Number:	HL-AS-2835HW-3C-S1-08L-PCT-HR5
Part Type:	LED Package
Drive Level:	DC 100mA
Nominal CCT:	2700K
Power:	1 W
Average Current Density per LED die:	620.001mA/mm ²
Average Power Density per LED die:	2.067 W/mm ²
CRI:	90
Die Spacing:	0.15mm

Sampling Method:

LED samples for IESNA LM-80 testing consist of units built from a minimum of three manufacturing lots with each manufacturing lot built from different wafer lots built on non-consecutive days.

These manufacturing lots are picked to represent a wide parametric distribution.

Family products covered by this report:

According to *ENERGY STAR® Requirements for the Use of LM-80 Data*, the following products can be covered by this report base on the information and declaration provided by manufacturer. The information of these models shows that the covered products meet all section 4 requirements of *ENERGY STAR® Requirements for the Use of LM-80 Data* (September 28, 2017)

This report covers the following models:

Model type	Model name	CRI	CCT (K)	Series	Parallel	Power density (W/mm ²)	Current density per LED die (mA/mm ²)	Current per die (mA)	Distance between of dies(mm)	Current (mA)
Master model	HL-AS-2835HW-3C-S1-08L-PCT-HR5	90	2700K	3	1	0.1021	620.00	100	0.15	100
multiple model	HL-AS-2835HW-3C-S1-08L-PCT-HR5(R9)	90	2700K	3	1	0.1021	620.00	100	0.15	100
	HL-AS-2835HW-3C-S1-08-PCT-HR5	90	2700K	3	1	0.1021	620.00	100	0.15	100
	HL-AS-2835HW-3C-S1-08-PCT-HR5(R9)	90	2700K	3	1	0.1021	620.00	100	0.15	100
	HL-AS-2835DW-3C-S1-08L-PCT-HR5	90	2700K	3	1	0.1021	620.00	100	0.15	100
	HL-AS-2835DW-3C-S1-08L-PCT-HR5(R9)	90	2700K	3	1	0.1021	620.00	100	0.15	100
	HL-AS-2835DW-3C-S1-08-PCT-HR5	90	2700K	3	1	0.1021	620.00	100	0.15	100
	HL-AS-2835DW-3C-S1-08-PCT-HR5(R9)	90	2700K	3	1	0.1021	620.00	100	0.15	100
	HL-AS-2835HW-2C-S1-08L-PCT-HR5	90	2700K	2	1	0.1021	605.47	150	0.15	150
	HL-AS-2835HW-2C-S1-08L-PCT-HR5(R9)	90	2700K	2	1	0.1021	605.47	150	0.15	150
	HL-AS-2835HW-2C-S1-08-PCT-HR5	90	2700K	2	1	0.1021	605.47	150	0.15	150

Model type	Model name	CRI	CCT (K)	Series	Parallel	Power density (W/mm ²)	Current density per LED die (mA/mm ²)	Current per die (mA)	Distance between of dies(mm)	Current (mA)
multiple model	HL-AS-2835HW-2C-S1-08-PCT-HR5(R9)	90	2700K	2	1	0.1021	605.47	150	0.15	150
	HL-AS-2835DW-2C-S1-08L-PCT-HR5	90	2700K	2	1	0.1021	605.47	150	0.15	150
	HL-AS-2835DW-2C-S1-08L-PCT-HR5(R9)	90	2700K	2	1	0.1021	605.47	150	0.15	150
	HL-AS-2835DW-2C-S1-08-PCT-HR5	90	2700K	2	1	0.1021	605.47	150	0.15	150
	HL-AS-2835DW-2C-S1-08-PCT-HR5(R9)	90	2700K	2	1	0.1021	605.47	150	0.15	150
	HL-AS-2835HW-S1-08L-PCT-HR5	90	2700K	1	1	0.0204	620.00	60	/	60
	HL-AS-2835HW-S1-08L-PCT-HR5(R9)	90	2700K	1	1	0.0204	620.00	60	/	60
	HL-AS-2835HW-S1-08-PCT-HR5	90	2700K	1	1	0.0204	620.00	60	/	60
	HL-AS-2835HW-S1-08-PCT-HR5(R9)	90	2700K	1	1	0.0204	620.00	60	/	60
	HL-AS-2835DW-S1-08L-PCT-HR5	90	2700K	1	1	0.0510	605.47	150	/	150
	HL-AS-2835DW-S1-08L-PCT-HR5(R9)	90	2700K	1	1	0.0510	605.47	150	/	150
	HL-AS-2835DW-S1-08-PCT-HR5	90	2700K	1	1	0.0510	605.47	150	/	150
	HL-AS-2835DW-S1-08-PCT-HR5(R9)	90	2700K	1	1	0.0510	605.47	150	/	150
	SL-*D2835FTA-31KA*	90	2700K	3	1	0.1021	620.00	100	0.15	100
	SL-*D2835FTA-31KA*H	90	2700K	3	1	0.1021	620.00	100	0.15	100
	SL-*D2835FTA-31KA**	90	2700K	3	1	0.1021	620.00	100	0.15	100
	SL-*D2835FTA-31KA***	90	2700K	3	1	0.1021	620.00	100	0.15	100
	SL-*D2835FTA-31KA**	90	2700K	3	1	0.1021	620.00	100	0.15	100
	SL-*D2835FTA-31KA*H*	90	2700K	3	1	0.1021	620.00	100	0.15	100
	SL-*D2835FTA-31KA*H**	90	2700K	3	1	0.1021	620.00	100	0.15	100
SL-*D2835FTA-31KA*H***	90	2700K	3	1	0.1021	620.00	100	0.15	100	
SL-*D2835FTA-31KA*/	90	2700K	3	1	0.1021	620.00	100	0.15	100	
SL-*D2835FTA-31KA*H/*	90	2700K	3	1	0.1021	620.00	100	0.15	100	
SL-**D2835FTA-31KA****-APH***	90	2700K	3	1	0.1021	620.00	100	0.15	100	
multiple model	SL-*D2835FTA-21EA*	90	2700K	2	1	0.1021	605.47	150	0.15	150
	SL-*D2835FTA-21EA*H	90	2700K	2	1	0.1021	605.47	150	0.15	150
	SL-*D2835FTA-11KC*	90	2700K	1	1	0.1021	469.7	100	/	100
	SL-*D2835FTA-11KC*H	90	2700K	1	1	0.1021	469.7	100	/	100
	SL-*D2835FTA-11CA*	90	2700K	1	1	0.0204	620.00	60	/	60

Model type	Model name	CRI	CCT (K)	Series	Parallel	Power density (W/mm ²)	Current density per LED die (mA/mm ²)	Current per die (mA)	Distance between of dies(mm)	Current (mA)
	SL-*D2835FTA-11CA*H	90	2700K	1	1	0.0204	620.00	60	/	60
	SL-*D2835FTA-11EA*	90	2700K	1	1	0.0510	605.47	150	/	150
	SL-*D2835FTA-11EA*H	90	2700K	1	1	0.0510	605.47	150	/	150

Note:

- The first * is the letters I, N, W representing CCT. I means less than 3700K; N means 3700-4700K; W For more than 4700K. The second * is different product solutions (color coordination and application, special solutions, etc...).The third * and the fourth * and the fifth *are different version numbers.
- The first and second * of SL-***D2835FTA-31KA****-APH*** is a numbers 27, 30,40,50,65, which stand for CCT. Number. From three to six * is a different product solution (Color coordinate and applications and special solution etc...). From seven to nine * is different version numbers.

1.2 Standards and Reference Documentations

- ANSI/IES LM-80-15: IES Approved Method for Measuring Lumen Maintenance of LED Light Sources.
- CIE 127:2007: Measurement of LEDs
- ENERGY STAR[®] Requirements for the Use of LM-80 Data (This standard was not accredited by IAS)

1.3 Testing Equipment

Device	Manufacture	Model No	Serial No	Calibration date	Calibration due date
0.3m integrating sphere	EVERFINE	Diameter 0.3m	1011119	2019-03-18	2020-03-17
Programmable Test Power for LEDs	EVERFINE	LED300E	1008002	2019-03-26	2020-03-25
High accuracy array spectroradiometer	EVERFINE	HAAS-2000	1012016T	2019-03-18	2020-03-17
Standard Light Source	EVERFINE	D062	G100278CJ7351206	2018-12-24	2019-12-24
Precision digital stabilized DC power supply	EVERFINE	WY605-V110	G115987CJ7321114	2019-03-26	2020-03-25
Multilayer aging machine	BACL	B2-270	20023	2019-03-13	2020-03-12
DC Power Supply	BACL	B12001-12	90023	2018-12-17	2019-12-17

1.4 Drive Level

Samples are driven with a constant direct current (DC) during maintenance test, photometric and electrical measurement. The current value was regulated to within $\pm 3\%$ of the specified value of the manufacturer during maintenance test, and was within $\pm 0.5\%$ during photometric and electrical measurement test.

1.5 Ambient Conditions for Maintenance Test

For lumen maintenance test, samples within one data set, were installed on cooling boards in thermal chambers with minimal ambient airflow. The case temperature and ambient temperature was monitored by thermocouples which one was soldered to the coldest DUTs' case (TMP_{LED}) location, while the other is mounted at a distance of 5 mm above the TMP location.

During life testing, TMP_{LED} of the coldest LEDs were maintained at a temperature that was greater than or equal to 2°C below the corresponding nominal case temperature. Surrounding air was maintained at a temperature that was greater than or equal to 5°C below the corresponding nominal case temperature. Thermocouples were shielded from direct DUT optical radiation and comply with ASTM E230 Table 1 "Special Limits".

Samples were connected to DC power supply in series circuits with a constant current. The forward current was regulated to within $\pm 3\%$ of the specified value of the manufacturer.

The relative humidity within chamber was kept less than 65% during test.

For photometry measurement, the ambient temperature during test was set to 25°C \pm 2°C, RH <65%.

1.6 Photometric Measurement Method and Uncertainty

Integrating sphere and spectroradiometer is used to measure luminous flux and chromaticity coordinate u'v'. 2 π measurement was used and sample was driven by DC power supply. The forward current was regulated to within $\pm 0.5\%$ of the nominal value. The test system was calibrated by halogen reference lamp. The ambient temperature during test was set to 25°C \pm 2°C, RH <65%. The temperature measurement point was located in the sphere and the temperature was detected by a temperature probe.

The uncertainty of the light output measurements is U=1.59% (K=2), at the 95% confidence level. The uncertainty of the correlated color temperature measurements is U=21K (K=2), at the 95% confidence level.

The uncertainty of the temperature is U=0.8671°C (K=2), at the 95% confidence level.

1.7 Statement of Traceability

Bay Area Compliance Laboratories Corp. (Dongguan) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).

1.8 Sample Set

Data Set 1: 85°C, 100mA

Part Number: HL-AS-2835HW-3C-S1-08L-PCT-HR5
Number of Units: 25
Case Temperature: >83°C
Ambient Temperature: >80°C
Life Test Drive Current: 100mA
Measurement Current: 100mA

Data Set 2: 105°C, 100mA

Part Number: HL-AS-2835HW-3C-S1-08L-PCT-HR5
Number of Units: 25
Case Temperature: >103°C
Ambient Temperature: >100°C
Life Test Drive Current: 100mA
Measurement Current: 100mA

2 - Summary of Test Result

Data Set:	Sample Size	Failures Observed:	Test Interval	Test Duration	α	β	Reported TM-21 L ₇₀ Lifetime
1	25	0	1000hrs	6000hrs	2.409E-06	1.004	>36000 hours
2	25	0	1000hrs	6000hrs	3.428E-06	1.004	>36000 hours


Average Lumen Maintenance (Percentage of Initial Luminous Flux)

Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	100.11%	99.87%	99.63%	99.40%	99.15%	98.91%
2	100.03%	99.70%	99.37%	99.03%	98.68%	98.33%

Average Chromaticity Shift

Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	0.0002	0.0005	0.0008	0.0011	0.0015	0.0018
2	0.0003	0.0006	0.0009	0.0013	0.0016	0.0019

Average Lumen Maintenance and Chromaticity Shift VS. Time

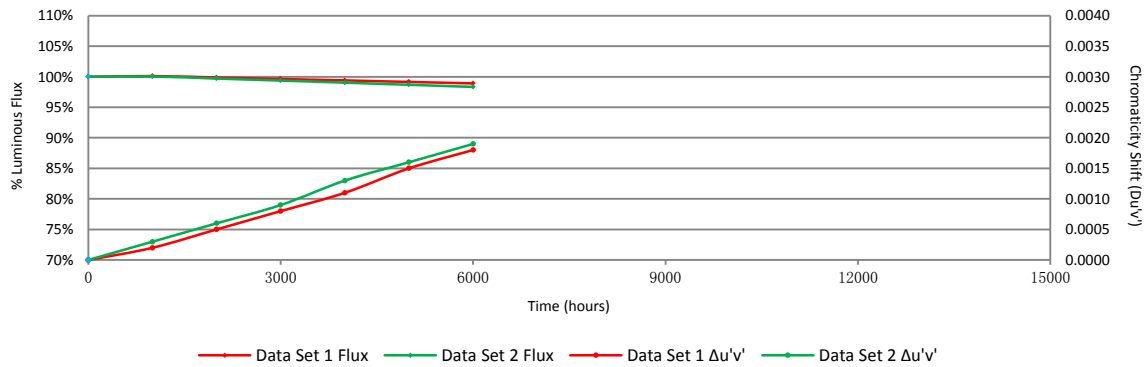

3 - Test Data

3.1 Data Set 1, 85°C, 100mA (Lumen Maintenance)

No.	Φ(lm)	Lumen Maintenance (%)					
	Ohr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	112.1	100.09	99.82	99.55	99.29	99.11	98.93
2	111.9	100.09	99.73	99.29	99.20	98.93	98.66
3	111.1	100.09	99.82	99.55	99.28	98.92	98.56
4	114.1	100.18	99.74	99.39	99.30	98.95	98.69
5	110.9	100.09	99.73	99.55	99.37	99.19	98.83
6	111.4	100.09	99.91	99.64	99.37	99.10	98.83
7	112.3	100.09	99.82	99.73	99.29	99.11	98.93
8	106.0	100.19	100.00	99.72	99.43	99.15	99.06
9	109.1	99.82	99.54	99.27	99.18	98.72	98.53
10	108.3	100.28	100.09	99.82	99.54	99.35	99.17
11	116.6	100.09	100.00	99.83	99.57	99.40	98.97
12	113.7	100.26	100.09	99.91	99.74	99.56	99.38
13	111.3	100.09	99.73	99.64	99.46	99.28	99.01
14	111.1	100.00	99.73	99.55	99.28	99.01	98.74
15	115.1	99.83	99.74	99.39	99.13	98.96	98.70
16	105.6	100.19	99.91	99.72	99.43	99.15	98.86
17	108.9	100.18	100.09	99.72	99.36	99.17	98.90
18	108.4	100.37	100.18	100.09	100.00	99.82	99.63
19	110.5	100.18	99.82	99.55	99.37	99.19	99.00
20	108.5	100.28	100.00	99.72	99.63	99.54	99.45
21	117.0	100.17	100.09	100.00	99.57	99.32	99.15
22	115.8	100.09	99.83	99.57	99.31	99.05	98.88
23	111.6	100.00	99.82	99.55	99.28	98.84	98.48
24	113.1	100.09	99.91	99.73	99.47	99.20	98.94
25	113.3	100.00	99.65	99.29	99.12	98.76	98.41
Avg.	111.5	100.11	99.87	99.63	99.40	99.15	98.91
Med.	111.4	100.09	99.82	99.64	99.37	99.15	98.90
st dev	3.0	0.13	0.16	0.21	0.20	0.26	0.30
Min.	105.6	99.82	99.54	99.27	99.12	98.72	98.41
Max.	117.0	100.37	100.18	100.09	100.00	99.82	99.63

3.2 Data Set 1, 85°C, 100mA (Forward Voltage)

No.	Forward Voltage (V)						
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	9.313	9.264	9.256	9.252	9.255	9.254	9.273
2	9.260	9.223	9.217	9.217	9.220	9.212	9.231
3	9.259	9.226	9.219	9.219	9.220	9.215	9.226
4	9.268	9.246	9.247	9.240	9.239	9.229	9.266
5	9.252	9.225	9.219	9.220	9.221	9.214	9.236
6	9.276	9.243	9.244	9.238	9.232	9.230	9.246
7	9.260	9.247	9.243	9.238	9.246	9.230	9.254
8	9.134	9.108	9.114	9.108	9.106	9.100	9.116
9	9.234	9.218	9.217	9.213	9.216	9.207	9.214
10	9.302	9.290	9.289	9.308	9.287	9.278	9.301
11	9.265	9.248	9.246	9.254	9.244	9.236	9.245
12	9.318	9.304	9.298	9.306	9.301	9.290	9.300
13	9.300	9.279	9.282	9.282	9.287	9.267	9.296
14	9.318	9.302	9.299	9.299	9.294	9.286	9.294
15	9.290	9.275	9.271	9.269	9.270	9.261	9.284
16	9.117	9.097	9.088	9.102	9.092	9.087	9.099
17	9.250	9.237	9.229	9.238	9.238	9.223	9.234
18	9.158	9.143	9.134	9.140	9.143	9.137	9.153
19	9.132	9.127	9.126	9.129	9.130	9.131	9.131
20	9.166	9.162	9.168	9.174	9.170	9.162	9.171
21	9.260	9.296	9.291	9.295	9.291	9.290	9.295
22	9.268	9.250	9.247	9.257	9.247	9.246	9.253
23	9.260	9.238	9.230	9.232	9.231	9.229	9.228
24	9.287	9.282	9.262	9.267	9.271	9.259	9.268
25	9.300	9.274	9.265	9.270	9.273	9.267	9.273
Avg.	9.250	9.232	9.228	9.231	9.229	9.222	9.235
Med.	9.260	9.246	9.244	9.238	9.239	9.230	9.246
st dev	0.060	0.060	0.059	0.059	0.058	0.057	0.059
Min.	9.117	9.097	9.088	9.102	9.092	9.087	9.099
Max.	9.318	9.304	9.299	9.308	9.301	9.290	9.301

3.3 Data Set 1, 85°C, 100mA (Chromaticity Shift)

No.	u'	v'	CCT(K)	Chromaticity Shift ($\Delta u'v'$)					
	0hr(Initial)			1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	0.2620	0.5239	2726	0.0001	0.0004	0.0007	0.0011	0.0017	0.0019
2	0.2612	0.5207	2757	0.0001	0.0002	0.0009	0.0012	0.0013	0.0016
3	0.2624	0.5213	2728	0.0002	0.0004	0.0005	0.0008	0.0013	0.0015
4	0.2606	0.5238	2755	0.0001	0.0003	0.0003	0.0007	0.0011	0.0013
5	0.2580	0.5210	2826	0.0001	0.0002	0.0003	0.0004	0.0009	0.0011
6	0.2617	0.5224	2738	0.0006	0.0007	0.0009	0.0011	0.0013	0.0015
7	0.2626	0.5262	2703	0.0002	0.0004	0.0008	0.0011	0.0013	0.0016
8	0.2599	0.5206	2786	0.0002	0.0001	0.0004	0.0006	0.0009	0.0015
9	0.2622	0.5218	2730	0.0004	0.0007	0.0008	0.0010	0.0011	0.0013
10	0.2631	0.5230	2706	0.0003	0.0004	0.0010	0.0013	0.0015	0.0018
11	0.2563	0.5236	2851	0.0002	0.0006	0.0013	0.0017	0.0023	0.0026
12	0.2628	0.5281	2691	0.0002	0.0005	0.0009	0.0013	0.0018	0.0021
13	0.2648	0.5239	2666	0.0002	0.0004	0.0009	0.0014	0.0016	0.0019
14	0.2627	0.5218	2719	0.0002	0.0004	0.0008	0.0011	0.0017	0.0020
15	0.2582	0.5264	2796	0.0002	0.0002	0.0006	0.0009	0.0011	0.0015
16	0.2605	0.5194	2778	0.0001	0.0001	0.0001	0.0002	0.0004	0.0005
17	0.2599	0.5213	2782	0.0003	0.0006	0.0009	0.0010	0.0011	0.0012
18	0.2606	0.5225	2760	0.0004	0.0007	0.0009	0.0011	0.0014	0.0017
19	0.2614	0.5242	2737	0.0003	0.0006	0.0010	0.0016	0.0020	0.0027
20	0.2601	0.5237	2767	0.0001	0.0002	0.0002	0.0004	0.0009	0.0011
21	0.2580	0.5250	2806	0.0003	0.0009	0.0014	0.0020	0.0027	0.0031
22	0.2592	0.5244	2782	0.0004	0.0008	0.0012	0.0016	0.0017	0.0018
23	0.2625	0.5232	2716	0.0002	0.0005	0.0011	0.0015	0.0019	0.0022
24	0.2615	0.5263	2726	0.0004	0.0008	0.0009	0.0015	0.0019	0.0023
25	0.2594	0.5229	2786	0.0002	0.0007	0.0013	0.0017	0.0018	0.0021
Avg.	0.2609	0.5233	2753	0.0002	0.0005	0.0008	0.0011	0.0015	0.0018
Med.	0.2612	0.5232	2755	0.0002	0.0004	0.0009	0.0011	0.0014	0.0017
st dev	0.0020	0.0021	44	0.0001	0.0002	0.0003	0.0004	0.0005	0.0006
Min.	0.2563	0.5194	2666	0.0001	0.0001	0.0001	0.0002	0.0004	0.0005
Max.	0.2648	0.5281	2851	0.0006	0.0009	0.0014	0.0020	0.0027	0.0031

3.4 Data Set 2, 105°C, 100mA (Lumen Maintenance)

No.	Φ(lm)	Lumen Maintenance (%)					
	Ohr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
26	109.3	100.09	100.00	99.73	99.54	99.09	98.90
27	103.7	100.10	99.81	99.52	99.13	98.75	98.46
28	110.1	100.00	99.64	99.18	98.82	98.37	98.00
29	98.9	100.15	99.73	99.25	99.02	98.75	98.55
30	106.6	99.91	99.62	99.44	99.06	98.69	98.50
31	111.6	99.91	99.55	99.28	98.92	98.48	98.03
32	112.4	100.18	99.73	99.38	99.11	98.84	98.40
33	111.8	99.82	99.55	99.46	99.11	98.84	98.57
34	111.5	100.09	99.91	99.46	99.10	98.92	98.65
35	113.7	99.82	99.30	98.86	98.68	98.24	97.80
36	109.5	100.18	99.82	99.54	99.27	99.00	98.81
37	108.6	99.91	99.54	99.17	98.80	98.34	97.97
38	109.5	100.18	99.82	99.45	99.00	98.63	98.17
39	111.3	100.18	99.73	99.46	99.19	98.74	98.20
40	111.2	100.18	99.64	99.28	98.83	98.56	98.20
41	112.5	100.00	99.91	99.82	99.47	99.20	98.93
42	109.0	99.82	99.45	99.08	98.72	98.35	97.98
43	109.6	99.91	99.54	99.00	98.81	98.45	97.99
44	114.3	100.17	99.65	99.21	98.78	98.34	97.99
45	117.0	100.26	99.91	99.57	99.15	98.89	98.46
46	105.2	100.19	99.90	99.71	99.43	99.24	98.86
47	109.3	99.91	99.36	98.90	98.35	97.99	97.62
48	107.7	100.09	100.00	99.72	99.26	98.89	98.42
49	110.7	99.73	99.64	99.37	99.01	98.64	98.28
50	110.3	100.00	99.64	99.27	99.09	98.73	98.55
Avg.	109.8	100.03	99.70	99.37	99.03	98.68	98.33
Med.	110.1	100.09	99.65	99.38	99.06	98.73	98.40
st dev	3.6	0.15	0.19	0.25	0.27	0.31	0.36
Min.	98.9	99.73	99.30	98.86	98.35	97.99	97.62
Max.	117.0	100.26	100.00	99.82	99.54	99.24	98.93

3.5 Data Set 2, 105°C, 100mA (Forward Voltage)


No.	Forward Voltage (V)						
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
26	9.289	9.276	9.267	9.269	9.269	9.267	9.276
27	9.133	9.120	9.109	9.112	9.116	9.114	9.119
28	9.262	9.254	9.248	9.254	9.249	9.249	9.257
29	8.992	8.995	9.005	9.012	9.025	9.030	9.037
30	9.139	9.132	9.112	9.107	9.107	9.114	9.114
31	9.260	9.224	9.239	9.226	9.222	9.224	9.225
32	9.328	9.304	9.300	9.299	9.294	9.297	9.311
33	9.264	9.236	9.241	9.233	9.228	9.233	9.241
34	9.266	9.253	9.261	9.261	9.255	9.260	9.276
35	9.292	9.257	9.263	9.259	9.264	9.260	9.268
36	9.209	9.182	9.180	9.178	9.181	9.173	9.184
37	9.219	9.193	9.192	9.194	9.196	9.193	9.203
38	9.193	9.168	9.171	9.167	9.169	9.165	9.183
39	9.267	9.249	9.253	9.245	9.244	9.240	9.252
40	9.240	9.245	9.227	9.225	9.216	9.222	9.232
41	9.198	9.180	9.179	9.182	9.172	9.178	9.183
42	9.260	9.233	9.236	9.234	9.233	9.226	9.233
43	9.275	9.259	9.255	9.254	9.248	9.247	9.251
44	9.198	9.180	9.179	9.175	9.173	9.172	9.175
45	9.266	9.237	9.243	9.246	9.238	9.234	9.242
46	9.195	9.182	9.181	9.186	9.183	9.179	9.178
47	9.220	9.175	9.180	9.179	9.173	9.175	9.171
48	9.156	9.121	9.127	9.128	9.124	9.125	9.125
49	9.334	9.311	9.313	9.309	9.313	9.304	9.317
50	9.316	9.285	9.286	9.288	9.287	9.284	9.292
Avg.	9.231	9.210	9.210	9.209	9.207	9.207	9.214
Med.	9.260	9.233	9.236	9.226	9.222	9.224	9.232
st dev	0.074	0.070	0.070	0.069	0.067	0.065	0.068
Min.	8.992	8.995	9.005	9.012	9.025	9.030	9.037
Max.	9.334	9.311	9.313	9.309	9.313	9.304	9.317

3.6 Data Set 2, 105°C, 100mA (Chromaticity Shift)

No.	u'	v'	CCT(K)	Chromaticity Shift ($\Delta u'v'$)					
	0hr(Initial)			1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
26	0.2617	0.5234	2734	0.0001	0.0003	0.0007	0.0011	0.0011	0.0014
27	0.2603	0.5191	2784	0.0001	0.0004	0.0004	0.0005	0.0004	0.0005
28	0.2579	0.5229	2819	0.0005	0.0009	0.0012	0.0013	0.0014	0.0015
29	0.2589	0.5171	2826	0.0002	0.0004	0.0005	0.0008	0.0010	0.0012
30	0.2629	0.5215	2716	0.0004	0.0006	0.0013	0.0017	0.0024	0.0032
31	0.2605	0.5240	2757	0.0004	0.0006	0.0012	0.0019	0.0027	0.0033
32	0.2608	0.5242	2749	0.0002	0.0007	0.0011	0.0018	0.0021	0.0028
33	0.2599	0.5245	2767	0.0004	0.0007	0.0011	0.0016	0.0019	0.0025
34	0.2603	0.5235	2763	0.0003	0.0007	0.0011	0.0014	0.0024	0.0031
35	0.2597	0.5216	2786	0.0002	0.0003	0.0005	0.0009	0.0011	0.0016
36	0.2596	0.5195	2798	0.0002	0.0004	0.0006	0.0011	0.0011	0.0013
37	0.2612	0.5207	2756	0.0004	0.0006	0.0008	0.0008	0.0011	0.0012
38	0.2601	0.5229	2771	0.0005	0.0010	0.0012	0.0015	0.0019	0.0021
39	0.2581	0.5231	2813	0.0002	0.0009	0.0010	0.0015	0.0019	0.0019
40	0.2591	0.5207	2801	0.0003	0.0007	0.0013	0.0016	0.0021	0.0023
41	0.2610	0.5217	2756	0.0003	0.0001	0.0009	0.0016	0.0022	0.0025
42	0.2655	0.5232	2655	0.0002	0.0004	0.0003	0.0006	0.0009	0.0016
43	0.2611	0.5235	2745	0.0001	0.0006	0.0007	0.0008	0.0010	0.0011
44	0.2575	0.5195	2845	0.0004	0.0010	0.0015	0.0018	0.0021	0.0025
45	0.2552	0.5198	2898	0.0002	0.0008	0.0014	0.0018	0.0023	0.0026
46	0.2627	0.5234	2712	0.0002	0.0004	0.0008	0.0012	0.0015	0.0019
47	0.2620	0.5209	2737	0.0001	0.0003	0.0005	0.0006	0.0005	0.0007
48	0.2643	0.5247	2674	0.0002	0.0006	0.0011	0.0013	0.0015	0.0019
49	0.2596	0.5224	2785	0.0001	0.0005	0.0008	0.0012	0.0016	0.0019
50	0.2597	0.5209	2787	0.0003	0.0006	0.0007	0.0009	0.0013	0.0017
Avg.	0.2604	0.5219	2769	0.0003	0.0006	0.0009	0.0013	0.0016	0.0019
Med.	0.2603	0.5224	2767	0.0002	0.0006	0.0009	0.0013	0.0015	0.0019
st dev	0.0022	0.0019	52	0.0001	0.0002	0.0003	0.0004	0.0006	0.0008
Min.	0.2552	0.5171	2655	0.0001	0.0001	0.0003	0.0005	0.0004	0.0005
Max.	0.2655	0.5247	2898	0.0005	0.0010	0.0015	0.0019	0.0027	0.0033


4 - DUT Photo

4.1 Mechanical Dimensions

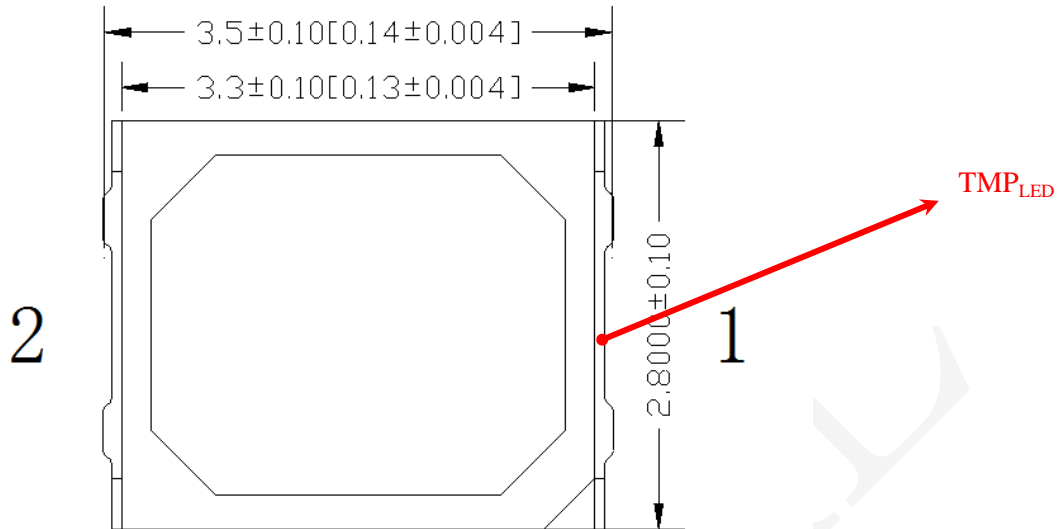

All dimensions are in millimeter

4.2 DUT Photo

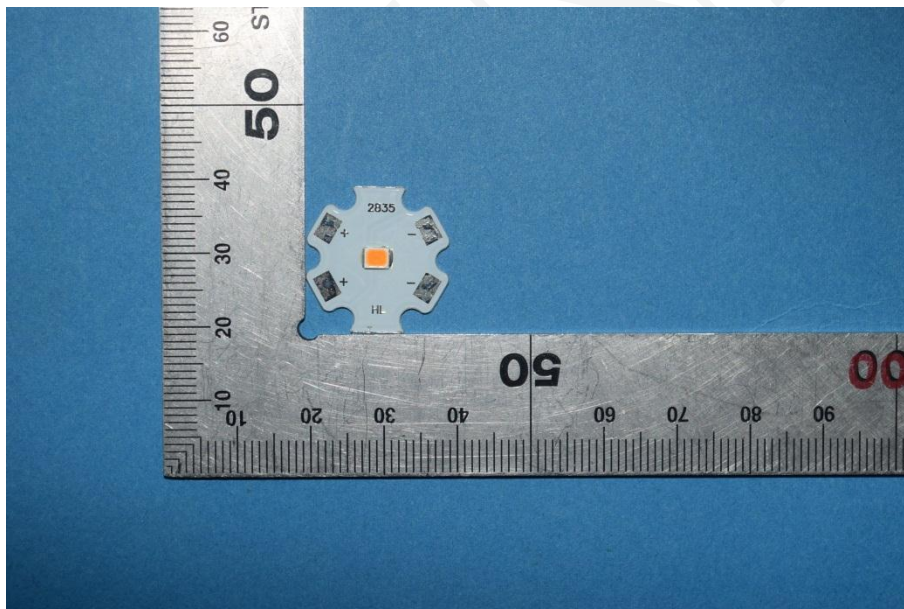

*****END OF REPORT*****